
## CONFIDENTIAL & PROPRIETARY INFORMATION

This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

## ALL DIMENSIONS ARE IN MM



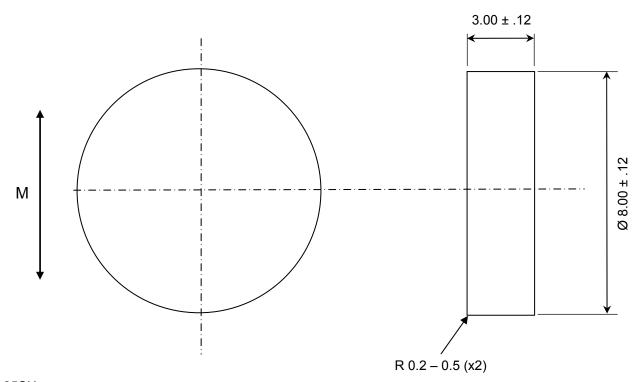

 $X.XX = \pm .01$   $X.X = \pm .25$   $X.XXX = \pm .005$   $X.XX = \pm .13$   $\frac{ANGLES}{\pm .5^{\circ}}$  DO NOT SCALE DRAWING

## NOTES:

1. MAGNET PROPERTIES PER N-35SH:

Br: 11,800-12,200 G Hc: 10,800-11,500 Oe Hci: ≥20,000 Oe T max: 150 C

2. SUPPLED MAGNETIZED ACROSS THE DIAMETER

3. PARTS ARE NICKEL PLATED FOR 15hrs SALT SPRAY MIN

-		4	100	
4	3	1		Ī
1				
	COM	ACH PLIAN	I IT	

REV	DESCRIPTION	DATE	BY
В	Changed CAD, incl cert, 3D	1/30/14	ВТ

## Alliance LLC 1450 CLARK DRIVE, VALPARAISO, INDIANA 46385 TOLERANCES (UNLESS OTHERWISE NOTED) DECIMAL METRIC SENSOR MACNET P(N), AL C8201

SENSOR MAGNET		P/N: ALC8301			
GRADE: N-35SH	Drwg by: BT	REV LEVEL: B			
COATING: Nickel	Appr by: DV	Appr. Dated: 05-15-2013			